








#### INTEGRATED DIMMABLE LED Light Fixture

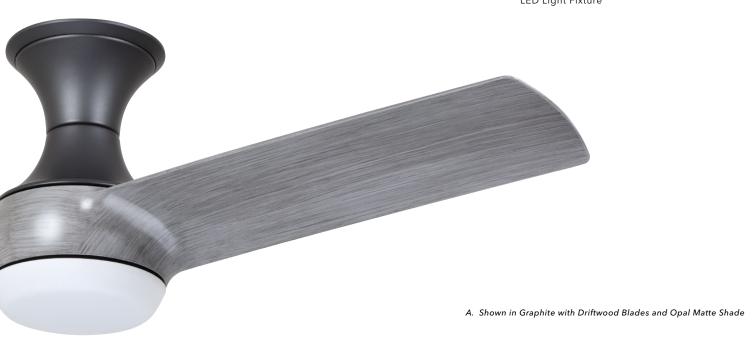

# **Duo CF560**

### **MODEL FEATURES**

- 54" Blade Span
- 2 Blades
- Flush Mount
- Integrated Dimmable LED Light Fixture with Shatter-Resistant Opal Matte Shade

6-Speed Wall Control with Receiver








#### PERFORMANCE SPECIFICATIONS

Speed	Airflow	Electricity Use	Airflow Efficiency	RPM
	Cubic Ft. Per Min.	Watts (Excl. Lights)	Cubic Ft. Per Min. Per Watt	Revolutions per Minute
High	5062	66	77	145
Low	2876	18	157	70

	Accepts 2.5" DR	Amps	LED Specifications			
			Lumens	Watts	CRI	CCT (K)
20°	N/A	0.6	1500	18	90	3000

		Manual/Remote Reverse Switch		Downrod Length	Motor Lead Lengths
6-Speed Wall Control	Y	Remote	Y	N/A	N/A

## **ENERGYGUIDE INFORMATION**





B. Shown in Brushed Steel with Walnut Blades and Opal Matte Shade




C. Shown in Satin White with Satin White Blades and Opal Matte Shade

- A. **DUO GRAPHITE CF560GRT** Driftwood Blades, Opal Matte Shade
- B. **DUO BRUSHED STEEL CF560BS** Walnut Blades, Opal Matte Shade
- C. **DUO SATIN WHITE CF560SW** Satin White Blades, Opal Matte Shade

SHIPPING SPECIFICATIONS: Carton Weight: 25.00 LBS | Length: 30.00" | Width: 12.00" | Depth: 12.00"

## **Product Dimensions & Weight**



- A. Total Fan Height: 14.25"
- B. Bottom of Blade to Ceiling: 12.8"
- C. Width of Housing: 9.0"
- **D.** Width of Canopy: **N/A**

Motor Size (mm): **153 x 20** Product Weight: **17.9** LBS

# Included



6-Speed Wall Control with Receiver

# **Optional Control**



**SR600** 6-Speed Remote Control