

Builder CF700

MODEL FEATURES

- 52" Blade Span
- 5 Reversible Blades
- Die Cast Hanger Ball and Bracket
- Light Fixture Adaptable
- 4.5" Downrod
- Adaptable up to 3' Downrod





PERFORMANCE SPECIFICATIONS

Speed	Airflow	Electricity Use	Airflow Efficiency	RPM	
Sheed	Cubic Ft. Per Min.	Watts (Excl. Lights)	Cubic Ft. Per Min. Per Watt	Revolutions per Minute	
High	4322	65	67	155	
Low	1491	10	150	50	

Blade	Accepts		LED Specifications			
Pitch	2.5" DR		Lumens	Watts	CRI	CCT (K)
11°	Y	0.6	N/A	N/A	N/A	N/A

		Manual/Remote Reverse Switch		Downrod Length	Motor Lead Lengths
3-Speed Pull Chain	N	Manual	N	4.5"	42"

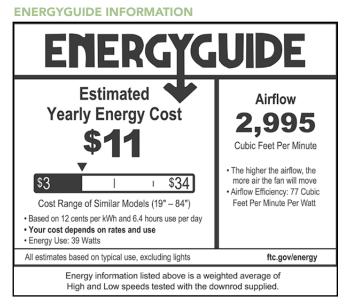


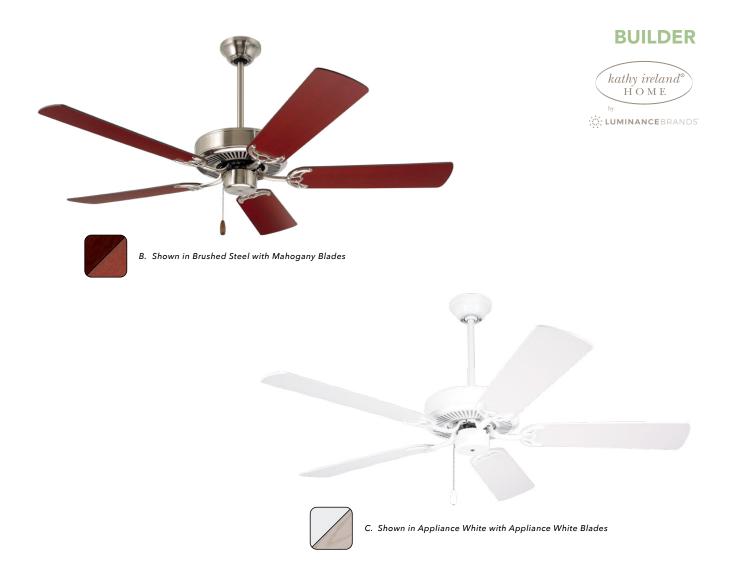

- A. BUILDER OIL RUBBED BRONZE CF700ORB - Dark Cherry/Medium Oak Blades
- B. BUILDER BRUSHED STEEL CF700BS - Dark Cherry/Mahogany Blade
- c. BUILDER APPLIANCE WHITE CF700WW - Appliance White/Bleached Oak Blades

SHIPPING SPECIFICATIONS: Carton Weight: 16.70 LBS | Length: 20.75" | Width: 12.75" | Depth: 8.00"

Product Dimensions & Weight



A. Total Fan Height: 12.0"
B. Bottom of Blade to Ceiling: 11.0"
C. Width of Housing: 11.5"
D. Width of Canopy: 5.2"
Motor Size (mm): 153 x 15
Product Weight: 14.4 LBS

Recommended Accessories Sold separately

LED Light Fixture

Optional Controls





SW90 Fan & Light Dual Slide Control

4-Speed Slide Wall Control